

## iSign

design J. M. Duthilleul



### Features



- Diffused light luminaire.
- Polycarbonate body and end caps, aluminium and sheet steel internal structure.
- Double M24 cable clamp uses Dmax=15,5mm electric cables.
- End caps can be unhooked via stainless steel clips.
- Extractable plate for lamp changes.
- Terminal boxes for quick connection.
- Available electronic and DALI (upon request) control gear, and permanent emergency light, 1.5 hours autonomy with 12 hour recharging cycle - 3 hours autonomy with 24 hour recharging cycle. Conforms to EN60598-2-22.
- Versions with RGB dynamic colour change and compatible with preconfigured light management systems.
- Luminaire ready for pass-through wiring.



### Application


With specific accessories iSign can be installed in wall/ceiling, single or double pendant version in horizontal and vertical position.



wall/ceiling-mounted



Horizontal double pendant application

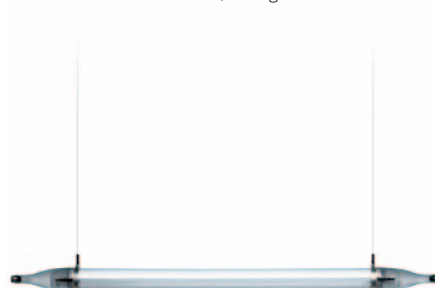


horizontal pendant




vertical pendant

iSign



ø 80 mm

light source	W	length	code	colour
 T 16 (G5)	Electronic			
	28W	1460	<b>6743</b>	24
	35W	1760	<b>6744</b>	24
	54W	1460	<b>6745</b>	24
	80W	1760	<b>6746</b>	24
Class of Insulation I				
Electronic complete with pass-through wiring				
28W	1460	<b>6736</b>	24	
35W	1760	<b>6737</b>	24	
39W	1160	<b>6738</b>	24	
54W	1460	<b>6739</b>	24	
80W	1760	<b>6740</b>	24	
2x28W	1460	<b>6741</b>	24	
2x35W	1760	<b>6742</b>	24	
DALI versions on request				
Electronic and permanent emergency light				
2x35W	1760	<b>MM58</b>	24	



ø 110 mm

light source	W	length	code	colour
 T 16 (G5)	Electronic			
	2x28W	1575	<b>6751</b>	24
	2x49W	1875	<b>6752</b>	24
	2x54W	1575	<b>6753</b>	24
Class of Insulation I				
Electronic complete with pass-through wiring				
2x28W	1575	<b>6748</b>	24	
2x49W	1875	<b>6749</b>	24	
2x54W	1575	<b>6750</b>	24	
DALI versions on request				
Electronic and permanent emergency light				
2x28W	1575	<b>MM59</b>	24	
RGB complete with pass-through cables				
3x28/54W	1575	<b>6755</b>	24	
3x35/49W	1875	<b>6756</b>	24	
Complete with: 1 Red tube 1 Green tube 1 Blue tube Occupies 3 DALI addresses				



Compatible with light management systems of the iGuzzini range illustrated on page 25. For the system definition, refer to the instructions.

accessories	ø 80		ø 110	
	code	colour	code	colour
Two plastic brackets for ceiling/wall installation	<b>9400</b>	15	<b>9412</b>	15
Two aluminium brackets for ceiling/wall installation	<b>9499</b>	15	<b>9619</b>	15
5-pole power base	<b>9401</b>	15	<b>9401</b>	15
Cable for single horizontal suspension L=1500	<b>9403</b>	00	<b>9421</b>	00
5-pole power base with cables for single horizontal suspension L=1500	<b>9402</b>	15 To be ordered with code 9403	<b>9413</b>	15 To be ordered with code 9421
Cable for double horizontal suspension L=1500	<b>9409</b>	00	<b>9423</b>	00
5-pole power base with cables for double horizontal suspension L=1500	<b>9408</b>	15 To be ordered with code 9409	<b>9422</b>	15 To be ordered with code 9423
5-pole power base with cables for single vertical suspension L=1500	<b>9410</b>	15	<b>9431</b>	15
5-pole power base with cables for double vertical suspension L=1500	<b>9411</b>	15	<b>9432</b>	15